DIO Indoor 1.60



Specification

Material	MR8
Refractive Index	1.597
Gravity	1.30
Abbe Value	42
UV cut off (mm)	400
Color	Clear

Addition (dpt)	0.75~3.50
Base curve	0.5~12BC
Max Diameters (mm)	75
Fitting Height (mm)	14/16/18
Available Corridor length (mm	9/11/13
ID Mark	INM

Lens Features

Specially tailored indoor progressive lens

Distortion free room distance clear vision from 0.4mm to2


Wider intermediate & near vision

For all indoor activities (Meeting, computing, painting, reac


Order just as normal progressive lenses

(DIO design software will convert power to be produced)

Power Chart

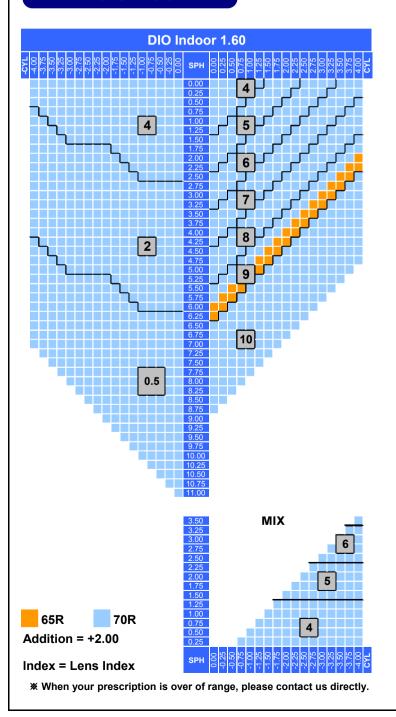

Lens Marking Layout



Add-on Features

8	Precal
	Remote Edging
Image: Control of the	Special thickness
R _x ⁺	Rx compensation
- <u>-</u>	Decentration
>4	Hi cylinder (4-6)
	Prism (≤ 4 Δ)
	Mirror coating
	Tinting